


PROSOL 30-35-40


PUNCHED STAINLESS STEEL 1.4016
WITH PROTECTIVE FILM

PROSOL 30-35-40 in steel are punched joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PLSAC 30F/308F/309F/308FS/309FS/3010FS/3016FS



PLSAC 35F/358F/359F/358FS/359FS/3516FS



PLSAC 40F/409FS



STAINLESS ST. 1.4016 punched - with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

| Article | Width-thick. | |
|-----------|---------------|--|
| PLSAC 30F | 30 mm - 10/10 | |
| PLSAC 35F | 35 mm - 10/10 | |
| PLSAC 40F | 40 mm - 12/10 | |

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 0,83 lm - pack. 20 Pcs



| Article | Width-thick. | |
|-------------|---------------|---|
| PLSAC 308FS | 30 mm - 10/10 | |
| PLSAC 358FS | 35 mm - 10/10 | * |

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs



| Article | Width-thick. | |
|-------------|---------------|---|
| PLSAC 309FS | 30 mm - 10/10 | |
| PLSAC 359FS | 35 mm - 10/10 | * |
| PLSAC 409FS | 40 mm - 12/10 | * |

STAINLESS ST. 1.4016 punched thermo packed
bar length 0,83 lm - pack. 20 Pcs



| Article | Width-thick. | |
|------------|---------------|---|
| PLSAC 308F | 30 mm - 10/10 | |
| PLSAC 358F | 35 mm - 10/10 | * |

STAINLESS ST. 1.4016 punched thermo packed
bar length 0,93 lm - pack. 20 Pcs



| Article | Width-thick. | |
|------------|---------------|---|
| PLSAC 309F | 30 mm - 10/10 | |
| PLSAC 359F | 35 mm - 10/10 | * |

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pcs





| Article | Width-thick. | |
|--------------|---------------|--|
| PLSAC 3010FS | 30 mm - 10/10 | |

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs



| Article | Width-thick. | |
|--------------|---------------|---|
| PLSAC 3016FS | 30 mm - 10/10 | |
| PLSAC 3516FS | 35 mm - 10/10 | * |

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

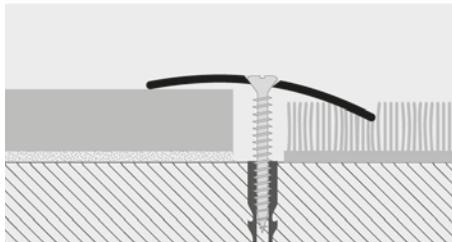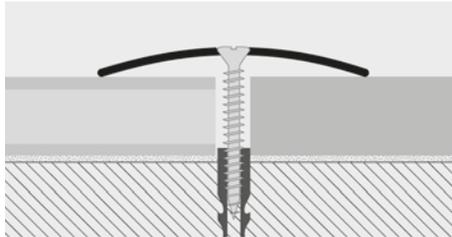

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



On demand hand-brushed stainless steel (Prices to be agreed. Production delay 4/5 weeks)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed